
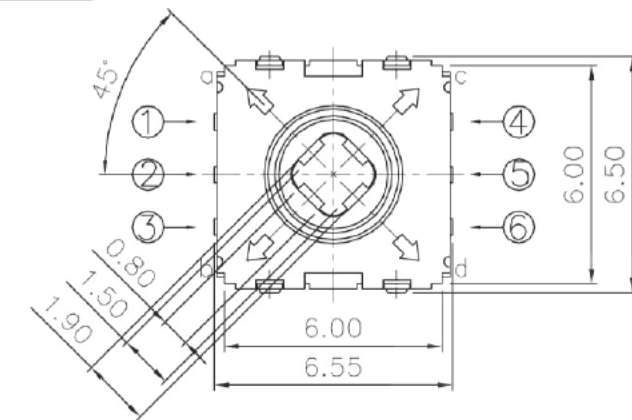
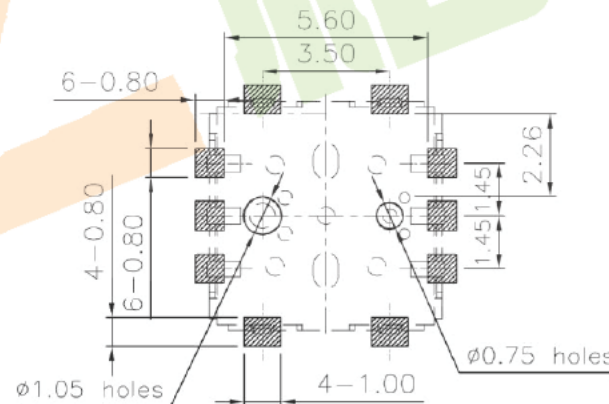
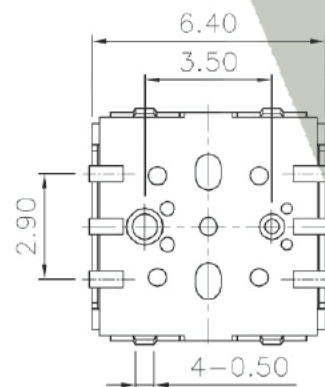
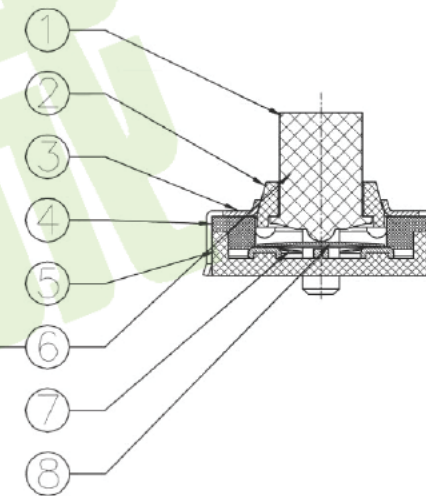



NOTE:
Operating Force:
lever portion 160 ± 35 gf
Push portion 250 ± 35 gf

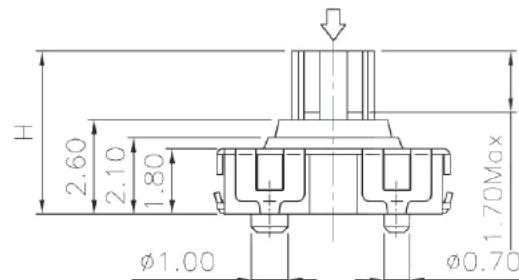

PCB Layout(Pattern Side)

⑧	Contact 2	—	1	F.Ag/SUS/φ3.5	Natural	—
⑦	Contact 1	—	4	F.Ag/SUS/φ2.4	Natural	—
⑥	Terminal	—	6	Brass(0.15t)	Plating silver	—
⑤	Base	—	1	LCP	Black	—
④	Gasket	—	1	LCP	Black	—
③	Cover	—	1	Brass(0.15t)	Plating silver	—
②	Axle sleeve	—	1	LCP	Ivory Tint	—
①	Keystoke	—	1	PA46	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS			DATE		 深圳市裕诚电子有限公司 SHENZHEN YUCHENG ELECTRONICS CO.,LTD			
DRAWN	J.X.Zhang		2013/7/26					
CHECKED					WEBSITE	www.ycelectron.com		
APPROVALS					PART NO.	M1-5368G		
TOLERANCES ARE			30~以下	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 
			10~30	±0.20				
			5~10	±0.15				
			~ 5	±0.10				
					±2"	DRAWING NO.	_____	SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			